



Laboratory



AcroPrep™ 24-well Filter Plates With Supor® Membrane

Description

The Pall AcroPrep 24-well filter plates use high performing Supor membrane that enable fast filtration with superior flow rates and low protein binding making them ideal for a variety of applications. The 24-well format allows up to 7 mL of sample to be filtered, eliminating the need to process samples with other labor intense methods and resulting in time savings. Because continuity of membrane media is important to researchers, these plates contain the same superior membrane found in other Pall device formats. Researchers can confidently incorporate these plates into their workflow without costly and time-consuming membrane evaluations.

The Supor Advantage

Supor is a low protein binding polyethersulfone (PES) membrane that is optimized for biological, pharmaceutical, and sterilizing filtration requirements. Supor membrane is low protein binding so it is an excellent choice for sample recovery. Supor membranes have extensive drug and chemical compatibility, making it ideal for many different applications.

Characteristics of the Supor membrane include:

- Fast filtration with superior flow rates
- High throughputs
- Low protein binding
- Low extractables
- High consistency

Application Versatility

Protein Purification: High performance Supor membrane offers optimal support to retain chromatography sorbents while allowing smooth flow of buffers.

Lysate Clearance and General Sample Preparation: Supor membrane is ideal for particulate removal or lysate clearance prior to downstream analysis or subsequent purifications.



Multiplexing Assays: These high-performance membranes do not trap microspheres in the membrane matrix, ensuring superior bead recovery and reducing false positives.

Aqueous Filtration: The broad drug and chemical compatibility of the Supor membrane make it ideal for filtering aqueous solutions that require collections, separation, or removal of contaminants.

AcroPrep 24-Well Filter Plate Features

- Receiver plate and lid are included
- Intrinsic plate and membrane properties minimize sample loss from non-specific binding
- Automation friendly – Compatible with all major automation platforms
- Designed in accordance with the ANSI/SLAS 1-2004 through ANSI/SLAS 6-2004
- Vacuum compatible – Compatible with all popular vacuum and positive pressure manifolds
- Centrifugation – Suitable for centrifugation with compatible rotors
- Gamma irradiated and Individually bagged for ease-of-use

Filtration. Separation. Solution.SM

Specifications

Materials of Construction

Filter Media

Supor (polyethersulfone membrane)

Plate Housing

Polypropylene

Lid

Polystyrene

Dimensions

Length: 12.8 cm (5.0 in.)

Width: 8.6 cm (3.4 in.)

Height (With receiver plate): 7.5 cm (2.97 in.)

Height (Without receiver plate): 3.9 cm (1.5 in.)

Well-Bottom Area

1.6 cm² (0.24 in²)

Recommended Working Volume

7 mL for vacuum

6 mL for centrifugation

Recommended Operating Vacuum

≥ 38 cm Hg (15 in. Hg)

Recommended Centrifugal Force

1,500 x g

Recommended Positive Pressure

20 psi

Typical Hold Up Volume

Membrane	Centrifuge (1500 x g)	Vacuum (15 in. Hg)	Positive Pressure (20 psi)
Supor	63 µL	78 µL	35 µL


Typical Time to Process

Supor Membrane Pore Size	Centrifuge* (1500 x g)	Vacuum (15 in. Hg)	Positive Pressure (20 psi)
0.1 µm	12	2	3
0.45 µm	< 10	< 1	5
0.8 µm	< 10	< 1	2
1.2 µm	< 10	< 1	< 1
5 µm	< 10	< 1	< 1

*Centrifuge was set for 10 mins. Actual processing time will vary with sample characteristics.

UV Extractables

24-well filter plates with 1.2 µm Supor membrane were scanned at 230 – 400 nm to assess the presence of any UV extractables. The figure below shows that there was no significant absorbance which was seen in all the filter plates tested.

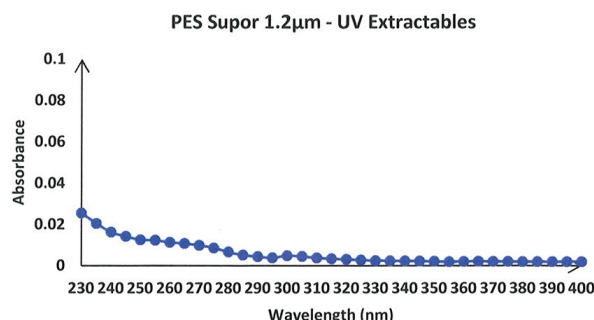

Ordering Information

VWR US Cat. No.	VWR EU Cat. No.	Pall Part No.	Description	Pkg
76457-240	738-0246	97029	AcroPrep 24-well 0.1 µm Supor	8/pkg
76457-242	738-0245	97030	AcroPrep 24-well 0.1 µm Supor	2/pkg
76457-244	738-0244	97031	AcroPrep 24-well 0.45 µm Supor	8/pkg
76457-246	738-0243	97032	AcroPrep 24-well 0.45 µm Supor	2/pkg
76457-248	738-0242	97033	AcroPrep 24-well 0.8 µm Supor	8/pkg
76457-250	738-0241	97034	AcroPrep 24-well 0.8 µm Supor	2/pkg
76457-252	738-0240	97035	AcroPrep 24-well 1.2 µm Supor	8/pkg
76457-254	738-0239	97036	AcroPrep 24-well 1.2 µm Supor	2/pkg
76457-256	738-0238	97047	AcroPrep 24-well 5 µm Supor	8/pkg
76457-258	738-0237	97048	AcroPrep 24-well 5 µm Supor	2/pkg
76360-452	738-0222	97017	AcroPrep 24-well 0.2 µm Supor EKV	2/pkg
76360-450	738-0221	97027	AcroPrep 24-well 0.2 µm Supor EKV	8/pkg



Ordering:
vwr.com

© 2021 Pall Corporation. Pall, AcroPrep, and Supor are trademarks of Pall Corporation. ® indicates a trademark registered in the USA.
Filtration. Separation. Solution. is a service mark of Pall Corporation.

3/21, PDF, GN20.1028

Filtration. Separation. Solution.™

VWR.COM

delivered by **VWR™**

Prices, product, and/or services details are current when published and subject to change without notice. | Certain products or services may be limited by country, federal, state, provincial, or local regulations. | VWR, part of Avantor, makes no claims or warranties concerning sustainable/green products. Any claims concerning sustainable/green products are the sole claims of the manufacturer and not those of VWR International, LLC and/or Avantor, Inc. or affiliates. Offers valid in countries listed above, void where prohibited by law or company policy, while supplies last. | Trademarks are owned by Avantor, Inc. or its affiliates, unless otherwise noted. | Visit vwr.com to view our privacy policy, trademark owners, and additional disclaimers. © 2021 Avantor, Inc. All rights reserved.