



VisiLED Brightfield Lightheads

Illumination system specially developed for stereo microscopy and macroscopy applications.

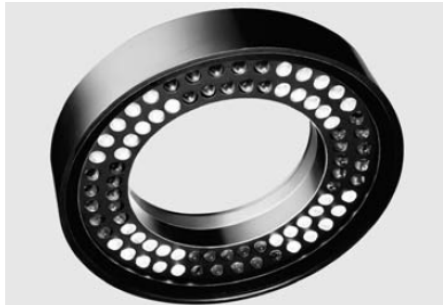

Brightfield ringlight, S80-55

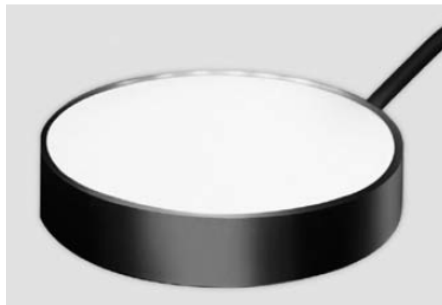

Transmitted Light Stage

Features

- Easily adaptable to microscope objectives by means of thumb screw and clamp ring.
- Homogeneous illumination
- Long operating life: typically 50,000 h by actively controlling the LED's temperature.
- Segments controllable in different preset modes for optimum contrasting.





Lightheads					
Description	Part-No.	Free working distance (FWD)	Max. illuminance	Inner Ø	Outer Ø
LED Brightfield ringlight "S40-55"	400 100	55–110 mm (2.17"–4.33")	80 klx (75 mm) (2.95")	66 mm (2.60")	114 mm (4.49")
LED Brightfield ringlight "S80-25"	400 225	25–50 mm (0.98"–1.97")	320 klx (30 mm) (1.18")	66 mm (2.60")	114 mm (4.49")
LED Brightfield ringlight "S80-55"	400 255	50–135 mm (2.17"–5.32")	200 klx (75 mm) (2.95")	66 mm (2.60")	114 mm (4.49")
LED Brightfield ringlight "S80-65 N"	400 265	35–100 mm (1.38"–3.94")	130 klx (55 mm) (2.17")	81 mm (3.19")	130 mm (5.12")
Transmitted light stage "TLS-BF"	400 400		20,000 cd/m ² (luminance in center)	active 50 mm (1.97")	84 mm (3.31")



Accessories	
Description	Part-No.
Combi-kit to combine one brightfield and the darkfield for mixed illumination. (not S80-65 N)	400 500
Polarization filter set for S80-55 brightfield ringlight.	400 550
Polarization filter attachment for transmitted light stage.	158 500
Protection window for brightfield ringlights (not S80-65 N)	400 560
Diffusor for brightfield ringlights (not S80-65 N)	400 570

Version 09.2014



VisiLED Brightfield Lightheads

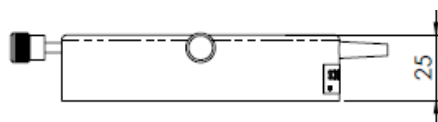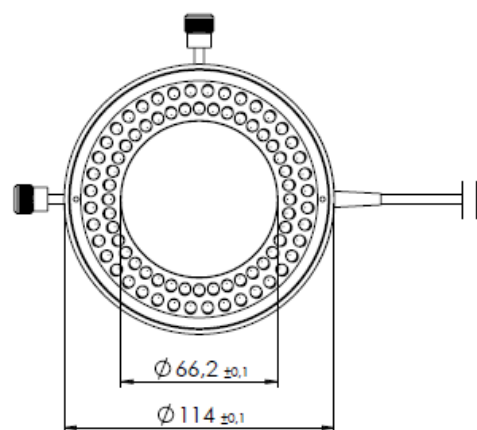

Brightfield ringlight S40-55, S80-25, S80-55

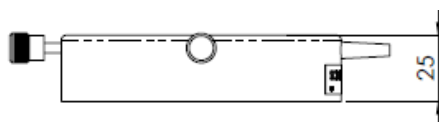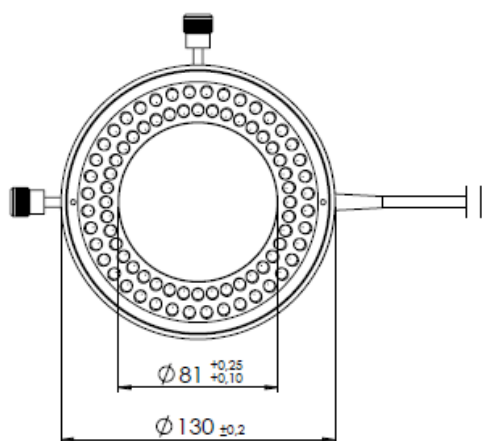

Brightfield ringlight S80-65 N

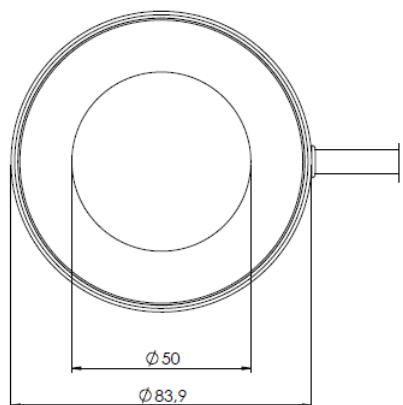

Transmitted light stage

Objective adaptors for ringlights

Ø 58 mm to Ø 66 mm	157 450
Ø 60 mm to Ø 66 mm	157 452