
SGE Syringes

PRODUCT DATA

Syringes | Gas tight

The comprehensive range of SGE syringes are designed and tested to meet critical specifications. The syringe range offers a never before seen level of durability, clarity and accuracy in the laboratory. No other syringe range provides such brilliance.

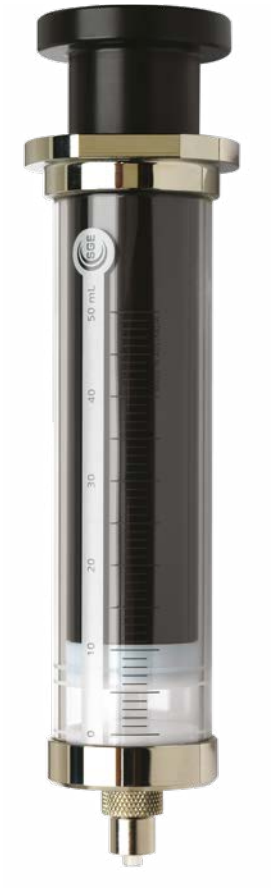

Features and benefits

- PTFE plunger tip for perfect sealing.
- Metal back flange with flat sides prevents syringe rolling off benches.
- Bright white backing strip with black scale markings for accurate reading of the syringe scale.
- Metal cap on fixed needle syringes protects the syringe barrel from chipping and breakage.

Recommended applications

- Manual GC and LC sample injection
- Liquid dispensing

Product specifications

Accuracy and reproducibility	±1% (dispensed volume)
Borosilicate glass barrel outer diameter (OD)	10 µL = 6.5 mm, 25-500 µL = 8 mm, 1 mL = 8.8 mm, 2.5 mL = 10.8 mm, 5 mL = 13.7 mm, 10 mL = 18 mm, 25 mL = 27 mm, 50 mL = 32.6 mm, 100 mL = 40.6 mm
Scale length	10 µL = 54.1 mm, 25 µL - 25 mL = 60 mm, 50 mL = 81 mm, 100 mL = 114 mm
Volume range	10 µL - 100 mL

Fixed and removable needle, Luer and Luer Lock versions are available.

For more information about this product visit www.trajanscimed.com or contact techsupport@trajanscimed.com

PD-1097-G_RevE © Trajan Scientific Australia Pty Ltd 11/2018