HONEYWELL NEOPRENE GLOVEBOX GLOVES


New premium quality safety gloves with protection against chemical and radio-active contamination and improved comfort and grip. Eco-Friendly Manufacturing*.



We know that workers' hands deserve unique consideration when they are exposed to chemical and radiation hazards. Therefore, Honeywell has created the new Neoprene Glovebox Gloves, combining high chemical and permeation resistance with excellent mechanical performance.

INDUSTRIES

- Pharmaceutical
- Military
- Medical
- Nuclear

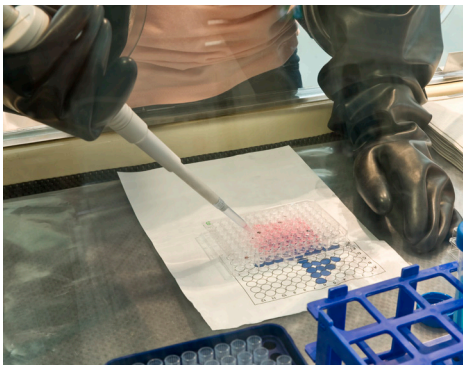

Glove box operations in the pharmaceutical, bio-technical, semi-conductor, nuclear, defense, and manufacturing industries.

FEATURES AND BENEFITS

PRODUCTIVITY AND EFFICIENCY

Better grip for handling small objects in oily and wet environments.

Increased productivity and reduced fatigue.

PREMIUM QUALITY PROTECTION

Enhanced mechanical performance.

Enhanced permeation resistance to vapors and gases.

Resistant to a broad range of chemicals: oils, greases and fuels.

EXCELLENT COMFORT

Much softer and flexible than current models.

Ambidextrous or hand specific.

*Produced with manufacturing technology minimizing solvent use.

Honeywell

Neoprene GBG Technical Specifications

TECHNICAL SPECIFICATIONS / COMPOSITION	
Coating Type	Polychloroprene (CR)
Coating Color	Black and White
Port Size	203 mm [8 in]
Length	815 mm [32 in]
Thickness	8N1532K and 8N1532AK: 0.45 mm ± 0.1 mm / 15 mil [0.38 mm] 8N3032K and 8N3032AK: 0.85 mm ± 0.1 mm/ 30 mil [0.76 mm]
Bead	3.2 mm to 6.4 mm [0.125 in to 0.25 in]
Dexterity	Level 5
Sizes	9Q (9 ¾), 10H (10 ½), hand specific and ambidextrous

CHEMICAL PROPERTIES	EN ISO 374:2016+A1:2018 LEVEL (15 mil version)	LEVEL (30 mil version)
(A) Methanol	3	6
(K) Sodium Hydroxide (40%)	6	6
(L) Sulphuric Acid (96%)	4	5
(M) Nitric Acid (65%)	6	6
(O) Aqueous Ammonia (25%)	3	6
(T) Formaldehyde	6	6

ORDERING INFORMATION

SKU	Description	Sizes	Protection Rating	
8N1532K/9Q	Neoprene GBG Port 203 mm [8 in], 15 mil [0.38 mm] thickness 815 mm [32 in] length (Hand Specific)	9 ¾	CE	EN ISO 374-1 Type A- AKLMOT
8N1532K/10H	Neoprene GBG Port 203 mm [8 in], 15 mil [0.38 mm] thickness 815 mm [32 in] length (Hand Specific)	10 ½		EN ISO 374-5 Virus
8N1532AK/9Q	Neoprene GBG Port 203 mm [8 in], 15 mil [0.38 mm] thickness 815 mm [32 in] length (Ambidextrous)	9 ¾		EN 388:2016 1101X
8N1532AK/10H	Neoprene GBG Port 203 mm [8 in], 15 mil [0.38 mm] thickness 815 mm [32 in] length (Ambidextrous)	10 ½		EN 421 2010-08
8N3032K/9Q	Neoprene GBG Port 203 mm [8 in], 30 mil [0.76 mm] thickness 815 mm [32 in] length (Hand Specific)	9 ¾	CE	EN ISO 374-1 Type A- AKLMOT
8N3032K/10H	Neoprene GBG Port 203 mm [8 in], 30 mil [0.76 mm] thickness 815 mm [32 in] length (Hand Specific)	10 ½		EN ISO 374-5 Virus
8N3032AK/9Q	Neoprene GBG Port 203 mm [8 in], 30 mil [0.76 mm] thickness 815 mm [32 in] length (Ambidextrous)	9 ¾		EN 388:2016 3101X
8N3032AK/10H	Neoprene GBG Port 203 mm [8 in], 30 mil [0.76 mm] thickness 815 mm [32 in] length (Ambidextrous)	10 ½		EN 421 2010-08

PACKAGING

1 pair/box

HONEYWELL SAFETY PRODUCTS

UNITED KINGDOM
Honeywell Safety Products UK Ltd
Edison Rd
Basingstoke RG21 6QD
United Kingdom
Phone: +44 (0) 1256 693 200
Fax: +44 (0) 1256 693 300
Email: info-uk.hsp@honeywell.com

INTERNATIONAL
Honeywell Safety Products Europe SAS
Immeuble Edison Paris Nord 2
33, rue des Vanesses – CS 55288 Villepinte
95958 Roissy CDG Cedex – France
Phone: +33 (0) 1 49 90 79 79
Fax: +33 (0) 1 49 90 71 04
Email: info-export.hsp@honeywell.com

FOR TECHNICAL QUESTIONS
INDUSTRIAL SAFETY PPE TECHNICAL SUPPORT

Free Phone: 00 800 3344 2803 (free calls in Europe)
Phone: +44 (0) 1698 647 087 (paid calls)
Email: IS.PPE.TECHSUPPORT.EUROPE@honeywell.com

www.honeywellsafety.com

HIS_GLOV_Brilliance-Neoprene-GBG_DS_A4 | 03/20

© 2020 Honeywell International Inc.

THE FUTURE IS WHAT WE MAKE IT

Honeywell