TECHNICAL DATA SHEET

MATTHEW Pro GTX Mid ESD S3 CI Typ 1 No. 7678101 Sz. 36 - 48







LABELLING ACCORDING TO STANDARD

Standard for safety footwear EN ISO 20345 S3	Basic requirement for S3: **A** Antistatic shoe - **E** Energy absorption in the heel - **FO** Fuel resistance - **WRU** Water penetration and water absorption resistant upper - **P** Penetration resistance - Closed heel area - Profiled outsole
Additional requirements	**SRC** Slip resistance: Slip resistant on floors of ceramic tiles with a sodium lauryl sulfate (SLS) solution and on steel floors with glycerol. When it comes to slip resistance as defined by EN ISO 20345, SRC signifies the best possible rating a safety shoe can reach. **CI** COLD INSULATED

FORM

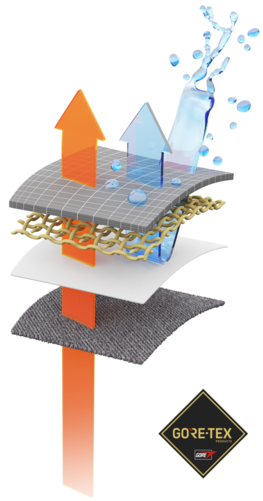
Safety laced boot 	Form B - in size 42, the upper height must be at least 11.3 cm.

FIT		
ERGO-ACTIVE Fußtypensystem	ERGO-ACTIVE foot type system with three fit variants The right shoe for everyone: Three different types of lasts do not only take into account length and width of the foot, but also toe length, heel width and angle of the ball of the foot.	
	Foot type 1: • For larger feet • Short toes • Wide ball and heel area • Steep ball angle	
	Foot type 2: • For normal feet • Long toes • Medium-wide ball and heel area • Flat ball angle	
	Foot type 3: • For slim feet • Medium-sized toes • Narrow ball and heel area • Medium ball angle	
AREAS OF APPLICATION		
Areas of application	Indoors and outdoors Areas where exposure to moisture is expected (S2) Areas where there is a risk of penetration from pointed and sharp objects (S3) Areas where there is a risk of electrostatic discharge (ESDS/ESD)	
FEATURES		
ESD equipment	Thanks to its excellent discharge capability, the shoe is suitable for work in ESD sensitive or electrostatically protected areas (EPA). The shoes comply to the standard 61340-5-1.	
Full, padded bellows tongue	• Excellent wearing comfort: The tongue prevents pressure marks and avoids dirt from entering into the shoe.	
Leather-free equipment	• Suitable for persons allergic to leather	
TPU overcap	• Excellent wear protection in the shoe tip • Protects the upper leather in this area against premature wear	

UPPER MATERIAL

Hydrophobized microfibre	• Areas of application S2/S3 • Synthetic material • Particularly soft • Retains its shape • Tear-resistant • Dries quickly • Abrasion-resistant and light • Water penetration and absorption in accordance with EN ISO 20345 S2; an improved resistance against water penetration is achieved by a special hydrophobation of the material
Textile material Cordura® (hydrophobized) CORDURA	• Areas of application S2/S3 • Synthetic material • Particularly resistant to wear and tear • Retains its shape • Tear-resistant • Dries quickly • Abrasion-resistant and light • Water penetration and absorption in accordance with EN ISO 20345 S2; an improved resistance against water penetration is achieved by a special hydrophobation of the material

LINING

Gore-Tex Performance Comfort Footwear 	The GORE-TEX membrane prevents water from entering into the shoe, but still allows your feet to "breathe". This technology provides ideal climate comfort for all outdoor activities, even in the harshest weather conditions. All components of the shoe construction are precisely attuned to one another and are subject to constant quality controls. The ALL-WEATHER membrane The all-weather membrane constantly provides an ideal climate comfort inside the shoe in all wind and weather conditions. Keeps your feet cool in summer and warm in winter. Tiny pores keep wind and wetness outside.

TOE PROTECTION CAP

Steel toe cap 	• Protection against impacts of min. 200 joules and pressure loading of min. 15 kN • Permanent edge coverage for cushioning • Ergonomically shaped • Comfortable toe room • Good coverage of the little toe area

INLAY SOLE

PENETRATION RESISTANCE	
Metal-free penetration protection	The textile midsole complies with the penetration safety standard EN 12568 and furthermore fulfils the additional requirements for penetration protection in accordance with EN ISO 20344 / 20345. The light and flexible material enables an increased elasticity of the shoe, which can particularly be recognized when working on uneven grounds or on your knees. The textile variant offers 100 % foot coverage compared to steel midsoles (foot coverage 85 % due to limits in the shoe manufacturing process). Being 100 % metal-free and antimagnetic, this equipment is used as penetration protection in safety shoes.
OUTSOLE	