



FEEL THE SW  
DIFFERENCE®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.



## PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION  
GLOVES WITH BIODEGRADABLE ECOTEK TECHNOLOGY

**ENGINEERED FOR LIFE SCIENCE, THESE  
DURABLE GLOVES PROTECT FROM CHEMICALS  
WITHOUT SACRIFICING GRIP OR DEXTERITY**

- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss\*
- Tested for use with chemotherapy drugs
- Extended-cuff for additional protection
- Silicone-free to prevent contamination
- Exceeds 1.5 AQL laboratory standards

PF

PF-12TL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 10.7g (large size)	 12.0"	 6.2 mil	EcoTek® Clean Washed Air Inspected	 TEAL


ECOTEK



Fully textured  
surface for wet  
and dry grip

Extended-cuff  
for added coverage  
and protection

Tear-resistant  
beaded cuff for  
easy donning

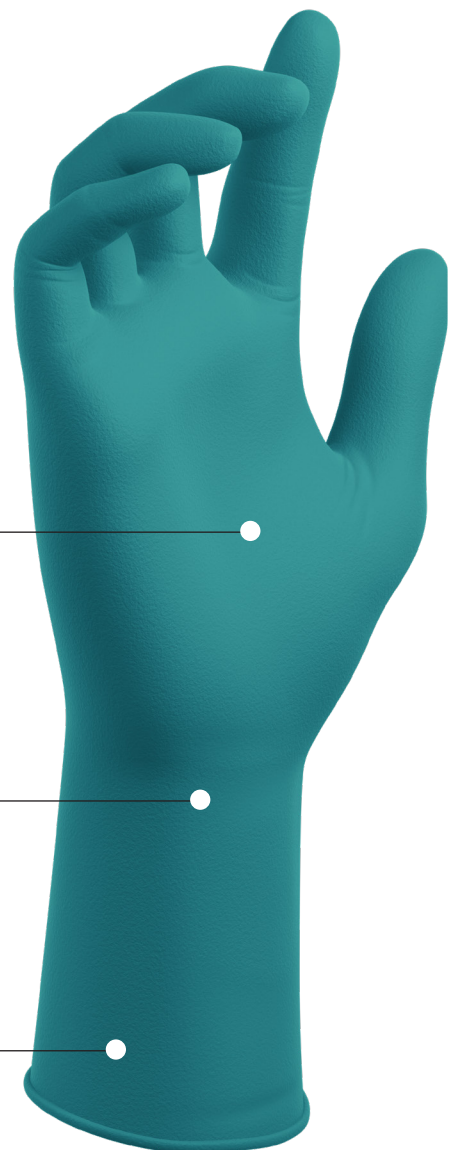

## TECHNICAL DATA



### PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION GLOVES WITH BIODEGRADABLE ECOTEK TECHNOLOGY

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT		PowerForm®	
GRADE		Powder-Free Exam	
MATERIAL		Nitrile	
THICKNESS	FINGER	7.1mil	0.18mm
	PALM	6.2mil	0.16mm
	CUFF	4.3mil	0.11mm
COLOR		Teal	
SURFACE		Fully Textured	
LENGTH		12.0"	305mm
WEIGHT		10.7g	
FIT TYPE		Ambidextrous	
CUFF TYPE		Beaded	
WATERTIGHT AQL		1.5	
ORIGIN COUNTRY		China	

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	21 MPa	20 MPa
ELONGATION:	575%	4560%

### INTEGRATED TECHNOLOGIES

**ECOTEK** Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.\*

100% Air Inspected


Clean Washed



\* Specifications based on size Large glove

## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020	EU 2016/425
EN 455-2000-2015	CAT III Complex Design
ASTM D6319-19	UL NFPA 1999-2018
ASTM D6978-05 (2019)	FDA 21 CFR 177.2600
ASTM F1671-13	
ASTM F739-12	
Reach EU 1907/2006	

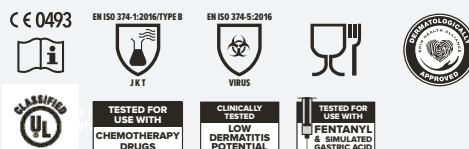

Please visit [swsafety.com/symbols](http://swsafety.com/symbols) for information on standards used on this document.

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N127361	XS 5½ – 76	3.0" 76mm	50 gloves per box 10 boxes per case
N127362	S 6½ – 7	3.4" 85mm	50 gloves per box 10 boxes per case
N127363	M 7½ – 8	3.8" 96mm	50 gloves per box 10 boxes per case
N127364	L 8½ – 9	4.5" 114mm	50 gloves per box 10 boxes per case
N127365	XL 9½ – 10	4.9" 125mm	50 gloves per box 10 boxes per case
N127366	2XL 10½ – 11	5.2" 133mm	50 gloves per box 10 boxes per case

## APPLICATIONS

### INDUSTRIAL

Assembly

### MEDICAL

Chemical Handling

Clinical

First Responder EMS

Food Processing

Handling and Packaging Class 1

Medical Devices

Laboratory

Light Chemical Mixing

Pharma Production

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N12736X1121



\*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.