



Falcon[®] Pipet Controller

The light, ergonomic, motorized pipet controller is designed for use with glass and plastic serological pipets from 0.5 to 100 mL volume ranges. Conveniently positioned switches change operating modes and speeds quickly to handle different liquid volumes and viscosities. Aspirating and dispensing speed is controlled through the finger triggers. When fully charged, the batteries enable up to 8 hours of continuous use. The large LCD display clearly indicates battery status, pipetting mode, and speed.

The Falcon Pipet Controller is supplied with a two-position charging stand, a universal battery charger, and three batteries. Two 0.2 μ m and two 0.45 μ m hydrophobic polytetrafluoroethylene (PTFE) filters are supplied with the pipet controller. Additional filters are available as standard accessories. The filters, pipet holder and nose piece are autoclavable.

Features

- Ergonomic design for exceptional comfort
- LCD display for continuous visualization of speed, modes and battery status
- Easy access to the battery compartment
- Easy maintenance




Ordering Information

Falcon[®] Pipet Controller



Battery cover with wings

VWR Cat. No.	Corning Cat. No.	Description
10028-602	357471	Falcon Pipet Controller, U.S. version with two 0.2 μm filters and two 0.45 μm filters, Two-position charging stand, universal power supply, and set of 3 batteries
Accessories		
10028-604	357472	Hydrophobic PTFE filter, 0.2 μ m (set of 5)
10028-606	357473	Hydrophobic PTFE filter, 0.45 μm (set of 5)
10028-608	357474	Silicone pipet holder
10028-632	357486	Battery set, 3 x AAA, NiMH
10028-612	357476	Nose piece
10028-614	357477	Connector gasket
10028-900	357487	Battery cover, without wings
10028-902	357488	Battery cover, with wings
10028-904	357489	Universal power supply, 9V with set of adapters (EU, US, UK, and AUS)
10028-906	357490	Two-position charging stand
490009-176	P2028	Wall hanger

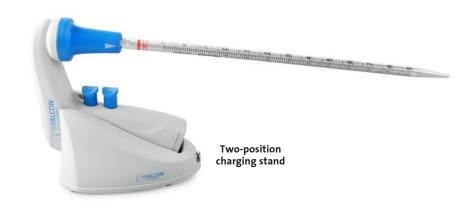

Warranty/Disclaimer: Unless otherwise specified, all products are for research use only. Not intended for use in diagnostic or therapeutic procedures. Corning Life Sciences makes no claims regarding the performance of these products for clinical or diagnostic applications.

CORNING

For additional product or technical information, visit vwr.com/corning, call 1.800.932.5000, or contact your VWR representative.

