

## Product datasheet

# CaptairFlow 391

Clean air enclosure

### Providing an ultra-clean, dust free enclosure

CaptairFlow vertical laminar flow cabinets are designed for tissue culture, non-pathogenic biological samples, food microbiology, cell culture, semi - conductor assembly:

#### Dust free workstation

- Protection against dust contamination
- Internal dust - free air quality achieved by high efficiency particulate filter (s) ( HEPA H14 or ULPA U17 )
- Optional carbon filter to protect samples from VOCs present in the laboratory room
- Class 5 air quality in the enclosure according ISO 14644-1

#### UV-C Germicidal Lamp

- To sterilize the interior and contents before usage to prevent cross-contamination from the previous experiment
- This UV lamp switches off automatically if the operator opens the lower door by accident during decontamination


#### Easy to Clean

- Seamless worktop with smooth corners (available in TRESPA®TopLab<sup>PLUS</sup> laminate or Stainless steel 304 L)
- Non-porous material

#### Ergonomic Design


- 4 models available for your handlings with large openings for easy access to your work
- Slanted sash provides an ergonomic position for comfort and productivity
- High luminosity, internal LED lighting > 800 lux



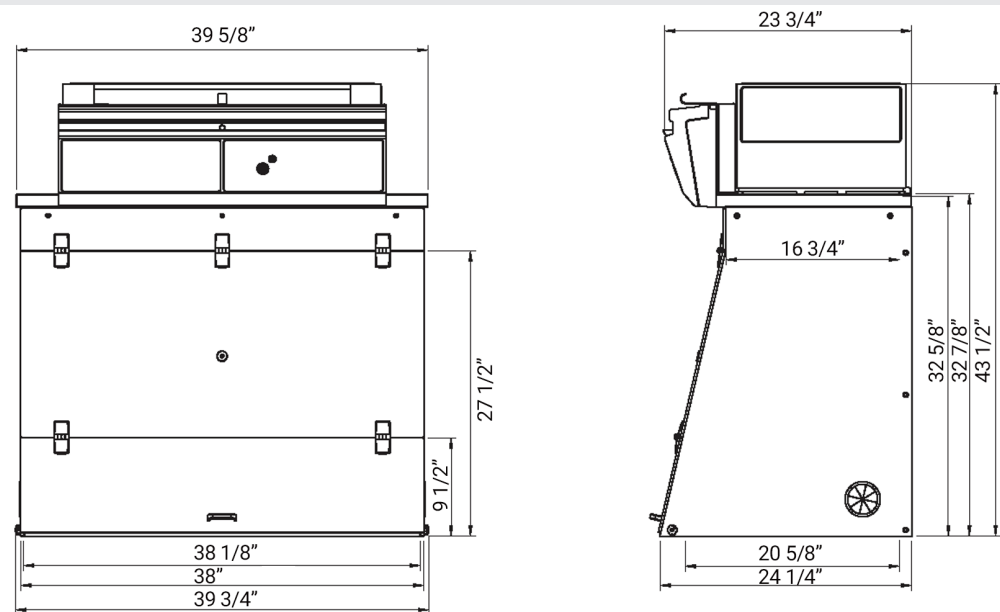


Please add 5 7/8" between the last filter and the ceiling to allow good air recirculation and to replace filters easily.

Work surfaces with built in spill tray

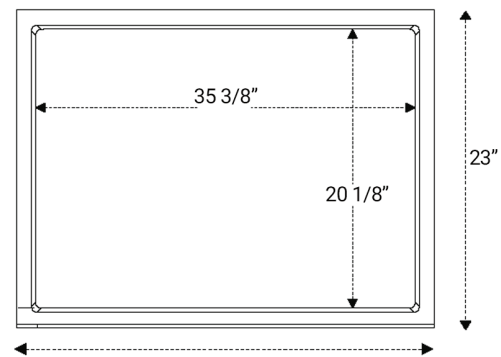


TRESPA® TopLab<sup>PLUS</sup>

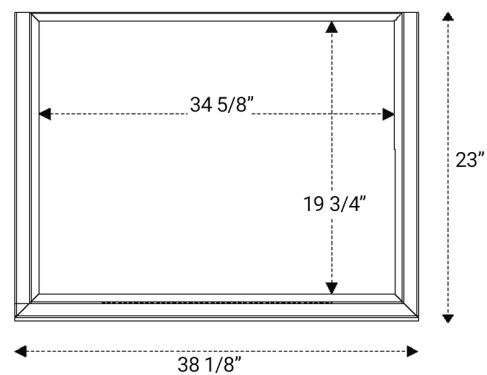


Stainless steel 304 L

Benchcap: fixed work bench

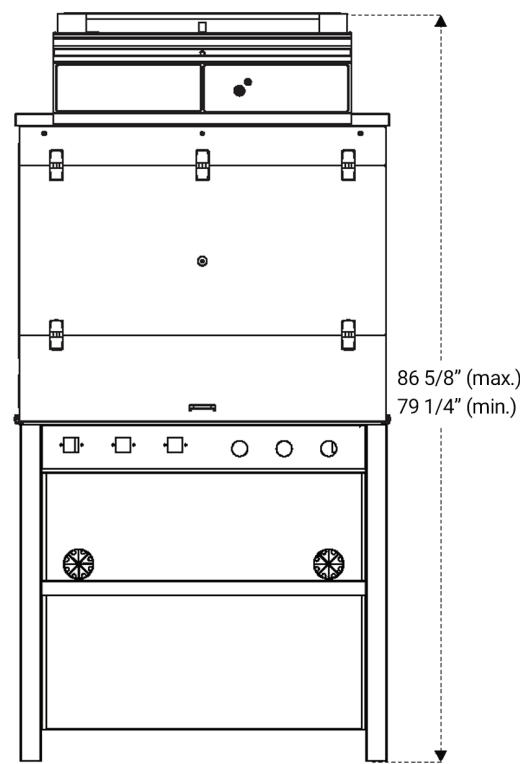

\*For Mobicap: rolling cart, deduct 1"

Designed with you in mind: Our filtration column can be configured for your specific application requirements.

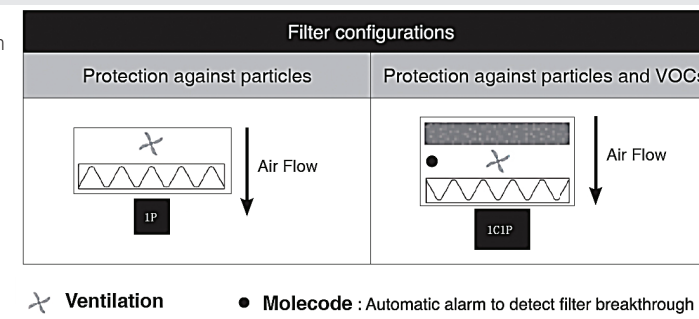

Filter types:

- 1P: Particulate filtration for powders
- 1C: Carbon filtration for gases and vapors

Model	1P	1C1P
<b>Safety Standards</b>	NF EN 61010 - CE Marking - EN 1822:1998 (HEPA H14 & ULPA U16 Filters) Air quality within the enclosure: ISO Class 5* EN 14644-1 standard	
<b>External Width</b>	39 3/4"	
<b>External Depth</b>	24 1/4"	
<b>External Height</b>	43 1/2" - 50 7/8"	
<b>Internal Width</b>	38 1/8"	
<b>Internal Depth</b>	19 3/4" - 20 5/8"	
<b>Internal Height</b>	32 5/8"	
<b>Voltage/Frequency (V-Hz)</b>	100-240 / 50-60	
<b>Air Face Velocity (fpm)</b>	68	
<b>Air Flow (CFM)</b>	203	88
<b>Power Consumption</b>	55	40
<b>Decibel Level (dBA)</b>	62	52
<b>Side and front panels</b>	Chemical resistant acrylic	
<b>Structure</b>	Corrosion resistant electro-galvanized steel coated with anti-acid polymer	
<b>Filtration Module</b>	Polypropylene	

Filtration

<b>Particulate filter (1P)</b>	HEPA H14: This filtration technology traps particles larger than 0.1µm with 99.995% efficiency according to the MPPS method set forth in the EN 1822-1 standard. ULPA U16: This filtration technology traps particles larger than 0.1 µm with 99.99995% efficiency according to the MPPS method set forth in the EN 1822-1 standard.
<b>Molecular Filter (optional)(1C)</b>	Adding a carbon filter to your enclosure allows protection of your samples from VOCs. AS filter: For organic vapors
<b>Particulate pre-filter</b>	Protect particulate filters from dust contained in the laboratory environment (only for 1P version)

Features

<b>Worktop</b>	TRESPA® TopLab <sup>PLUS</sup> , Glass or 304L Stainless Steel
<b>Internal Lighting</b>	LED-IP 44 - 6000K 850 lux
<b>eGuard app (Android or iOS)</b>	Mobile app for real time remote control of Smart devices
<b>Connectivity</b>	RJ45 cable connection to view and change workstation settings (cable included)
<b>Anemometer</b>	Monitors a drop in pressure that indicates pre-filter or filter replacement is required
<b>Side panel utility ports</b>	2 per unit - to allow electrical cables and/or fluid lines to enter the enclosure with ease
<b>UV Light</b>	Located on back panel - 15W - wave length: 254nm

Accessories

<b>Benches</b>	Rolling cart (Mobicap) or fixed bench (Benchcap)
<b>Shelves</b>	Internal metal sliding shelf (only for Benchcap)



*Erlab's state of the art Research & Development Laboratory relies exclusively on filtration*

# About Erlab

## **We provide safety, we protect your health**

Erlab invented the ductless fume hood in 1968. With more than 50 years of experience in the field of chemical filtration and protection of laboratory personnel; we know the formula for safety. With Erlab, you will never have to wonder or worry if our products are safe. We build each one of the following 7 ingredients into our products, and without all of them, your health and safety will be compromised.

### **1 Erlab R&D Laboratory**

The engineers and chemists in our state-of-the-art R&D laboratory understand molecular filtration. We are committed to designing products that are safe and of the highest quality, strive to improve our products, and continuously develop new products that provide greater protection in the laboratory.

### **2 Strict Safety Standards**

We hold ourselves to the highest standard and adhere to the strict AFNOR NF X 15-211: 2009 filtration safety standard as cited by ANSI Z9.5-2012.

### **3 A Published Chemical Listing**

It all begins here. Without this listing, we are not compliant with AFNOR NF X 15-211. Our in-house laboratory tests, as well as independent testing, to verify the retention capacity of over 700 chemicals for our filters.

### **4 Independent Testing**

Erlab filters have been independently tested multiple times at various concentrations guaranteeing that our safety solutions all adhere to the strict performance criteria of the AFNOR NF X 15-211:2009 standard assuring that the emission concentration at the filter exhaust will always be lower than 1% of the TLV.

### **5 Application Questionnaire (Valiquest)**

Our laboratory specialists will recommend the appropriate filtration fume hood, type of filter, and personalized advice.

### **6 Certificate of Validation for the chemicals used in the hood**

A certified PhD chemist issues a Certificate of Validation with a list of the chemicals approved for use in the hood.

### **7 Our Safety Program**

We back up our products 100%. This program includes your specialized chemical evaluation, validation of your hood upon installation, and a filtration safety specialist at your service to ensure that your hood is operating to its full potential.