



FEEL THE SW DIFFERENCE®

COMFORT AND DEXTERITY FOR EVERYDAY HAND PROTECTION.




TF-95LG

POWDER-FREE NITRILE EXAMINATION GLOVES WITH ENERGEL REJUVINATING TECHNOLOGY

FEATURING AN ENERGEL INNER COATING, THESE GLOVES SOOTHE AND MOISTURIZE DRY HANDS WITHOUT SACRIFICING DEXTERITY

- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Exceeds 1.5 AQL laboratory standards
- Fully textured surface for excellent wet and dry grip
- Touch-screen compatible
- Tear-resistant beaded cuff eases donning
- SHA Dermatologically Approved

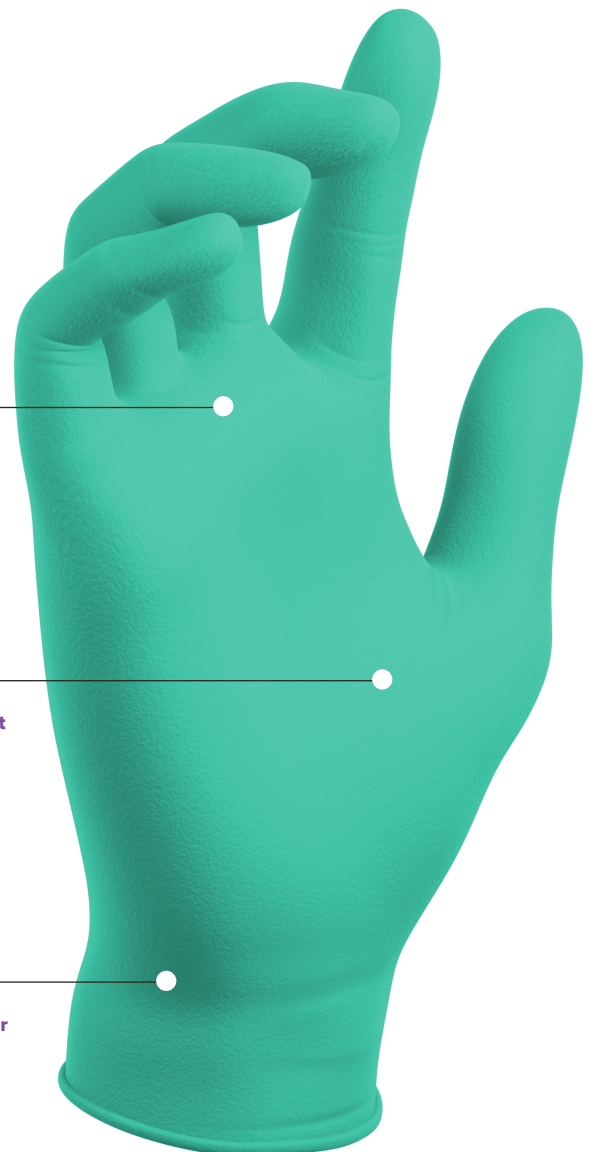

Optimal thickness for durability and tactile sensitivity

Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning

TF **TF-95LG**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
5.0g (large size)	9.5"	3.6 mil	EnerGel® EcoTek®	LIGHT GREEN

ecotek



SW®
 33278 Central Avenue, Unit 102, Union City, CA 94587, USA
 Tel: +1.510.429.8692 | Fax: +1.510.487.5347
 Trademarks and registered trademarks are the property of SW and its affiliates.
 ©2024 SW. All rights reserved.



TECHNICAL DATA



TF-95LG POWDER-FREE NITRILE EXAMINATION GLOVES WITH ENERGEL REJUVINATING TECHNOLOGY



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	TrueForm®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS	
FINGER	4.0mil 0.10mm
PALM	3.6mil 0.09mm
CUFF	3.0mil 0.08mm
COLOR	Light Green
SURFACE	
OUTER	Fully Textured
INNER	EnerGel®
LENGTH	9.5" 242mm
WEIGHT	5.0g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	22MPA	20 MPA
ELONGATION:	560%	550%

INTEGRATED TECHNOLOGIES

ENERGEL Hand Conditioning Technology hydrates and soothes the skin with purified aloe and has been clinically proven to prevent many skin ailments, like dermatitis. It has a healing effect that improves skin health.


ECOTEK Sustainable Technology: Product has been tested per ASTM D5526* Clean Washed 100% Air Inspected

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425

CAT III Complex Design
UL NFPA 1999-2018
FDA 21 CFR 177.2600



Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

VWR SKU NO.	MFG NO.	SIZE	PALM WIDTH	PACKAGING
76053-094	N128401	XS 5½ – 6	3.0" 75mm	100 gloves per box 10 boxes per case
76053-096	N128402	S 6½ – 7	3.4" 86mm	100 gloves per box 10 boxes per case
76053-098	N128403	M 7½ – 8	3.7" 95mm	100 gloves per box 10 boxes per case
76053-100	N128404	L 8½ – 9	4.2" 107mm	100 gloves per box 10 boxes per case
76050-932	N128405	XL 9½ – 10	4.6" 117mm	100 gloves per box 10 boxes per case

APPLICATIONS

- Chemical Handling
- Clinical
- First Responder EMS
- Handling and Packaging Class 1
- Medical Devices
- Laboratory
- Light Chemical Mixing
- Pharma Production

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N12840X1121



VWR.COM

Prices, product, and/or services details are current when published and subject to change without notice. | Certain products or services may be limited by federal, state, provincial, or local regulations. | VWR, part of Avantor, makes no claims or warranties concerning sustainable/green products. Any claims concerning sustainable/green products are the sole claims of the manufacturer and not those of VWR International, LLC and/or Avantor, Inc. or affiliates. All prices are in US dollars unless otherwise noted. Offers valid in US and Canada unless otherwise noted, void where prohibited by law or company policy, while supplies last. | Trademarks are owned by Avantor, Inc. or its affiliates, unless otherwise noted. | Visit vwr.com to view our privacy policy, trademark owners, and additional disclaimers. © 2024 Avantor, Inc. All rights reserved.

0524 Lit. No. 190218W

* EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.