


Maximum Security of Sample, User and Results




Workplace Safety

Scattering of powdery samples is eliminated and cross-contamination of samples is prevented.




Speed Up Your Process

Electrostatically charged weighing samples or containers are neutralized when the balance is being loaded, enabling fast dosing processes and an increased productivity.



Flexible Integrated Solution

The integrable Anti-static Kit for Excellence XP Analytical and XP26/56 Micro Balances can be configured flexibly: The activation of the ionization can be synchronized with the opening of the draft shield door. The point ionizer can be fixed in six different positions depending on sample size and shape, left- or right-handed users.

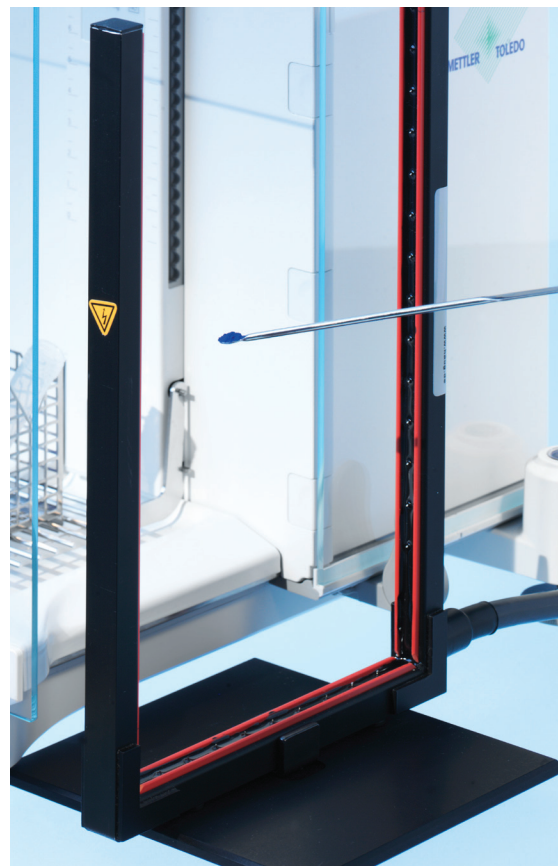

Anti-static Solutions

Stable and Correct Weighing Results

Does your balance display different or unstable weight values for the same weighing sample? This phenomenon is due to electrostatically charged samples which can lead to inaccurate results. Anti-static electrodes immediately neutralize your sample and container ensuring stable and correct results.

Anti-static Kits



	Part	Universal Anti-static Kit	Integrable Anti-static Kit	Additional Second Point Electrode for Integrable Anti-static Kit
Description		Complete Kit (incl. U-Electrode large and Universal Power Supply)	Complete Kit (incl. integrable Point Electrode and XP Power Supply)	Optional second Point Electrode for XP integrable Anti-static Kit
Balances		all balances	XP Analytical Balances and XP26/56 (incl. DR) Micro Balances	XP Analytical Balances and XP26/56 (incl. DR) Micro Balances
Order No.		110041	11107761	11107762

Single Anti-static Components

Single anti-static components can generally be used with every kind of balance. In conjunction with the power supply for XP Balances, the discharging process is even more efficient due to the automated and synchronized door opening on all XP Analytical, Micro and Ultra Micro Balances.



	Part	U-Electrode large	U-Electrode small	Point Electrode	XP Power Supply	Universal Power Supply
Description		Recommended for discharging all kinds of samples and tare containers	Recommended for discharging small samples	Recommended for discharging small samples on spatulas	Automated switch on / off, synchronized with door opening	
Balances		all balances	all balances	all balances	XP Analytical, Micro and Ultra Micro Balances	all balances
Order No.		120018	11140161	11107765	11107763	11107766

www.mt.com/lab-antistatic

For more information

Mettler-Toledo, Inc.

 USA
1900 Polaris Parkway
Columbus, Ohio 43240
Tel. (800) METTLER
Fax (614) 438-4525
Internet: www.mt.com

 Canada
2915 Argentia Road, Unit 6
Mississauga, Ontario L5N 8G6
Tel. (800) METTLER
Fax (800) 786-0042

Specifications subject to change without notice
METTLER TOLEDO® is a registered trademark
of Mettler-Toledo, Inc.

BAL-6811-LIT