


VWR Maximum Protection Non-Skid High-Top Boot Covers

- Non-Skid Sole Provides Maximum Traction on Wet and Smooth Surfaces
- Superior Coefficient of Friction
- Excellent Fluid and Particulate Barrier: >99.9% Bacterial Filtration Efficiency
- Breathable to Ensure User Comfort
- Soft, Cloth-Like Fabric with Maximum Tear Strength

VWR Maximum Protection Non-Skid High-Top Boot Covers are the cleanest and most durable within the entire VWR Protection line of apparel. These boot covers have been engineered to optimize skid-resistance, barrier protection, cleanliness, and comfort. Boot covers are rigorously tested and manufactured in an ISO Certified facility under stringent process controls to ensure that each product meets exacting quality standards and performs to specification. Our products are lot controlled and continuously validated through independent lab testing.

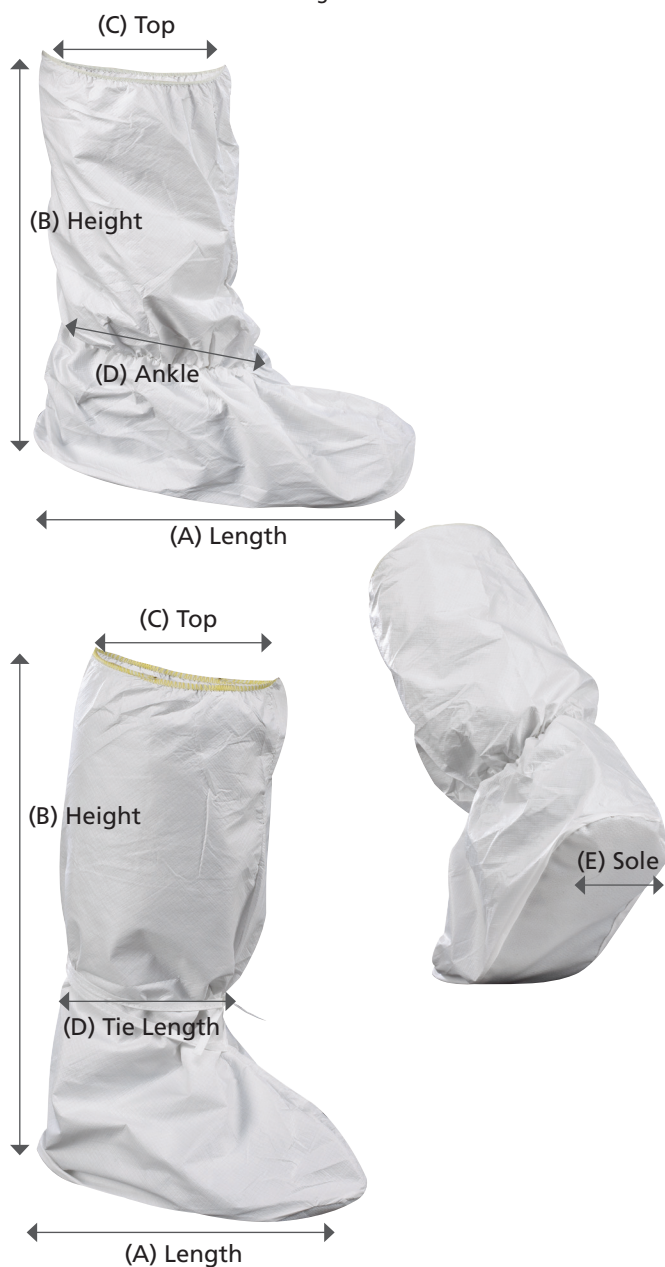

Standard Boot Cover Dimensions

Size	M	Universal	XL
Length (A)	11¼"	14"	15"
Height (B)	17"	17½"	18"
Top, Relaxed (C)	5¼"	5¾"	6"
Top, Stretched (C)	9"	9½"	11½"
Ankle, Relaxed (D)	6"	6½"	6¾"
Ankle, Stretched (D)	9¾"	11"	12½"
Sole Width (E)	4¼"	4½"	4¾"

Ankle Tie Boot Cover Dimensions

Size	M	Universal	XL
Length (A)	11¼"	14"	15"
Height (B)	18"	18½"	19"
Top, Relaxed (C)	4½"	5¼"	5"
Top, Stretched (C)	9"	11½"	12½"
Tie Length (D)	17"	17"	17"
Sole Width (E)	4¼"	4½"	4¾"

VWR Maximum Protection Non-Skid High-Top Boot Covers

Size	Cat. No.	Case of
White		
Medium	414004-417	100 Pair
Universal	414004-414	100 Pair
X-Large	414004-415	100 Pair
White with Ankle Ties		
Medium	414004-416	100 Pair
Universal	414004-418	100 Pair
X-Large	414004-419	100 Pair

To order, visit vwr.com or call your VWR Sales Representative today.

Material Properties for VWR® Maximum Protection Non-Skid High-Top Boot Covers

	Test Item	Result	Test Standard
PHYSICAL PROPERTIES	Particle Shedding (Helmke Drum)	Level I	IEST-RP-CC003.3
	Weight (g/m ²)	63	ASTM D3776
	Thickness (mm)	0.22	ASTM D1777
	Tensile Strength (Avg. lbs./in.)		
	Warp	25.2	ASTM D5034
	Filling	29.4	
	Trapezoid Tearing Strength (lbs./in.)		
	Lengthwise Yarns	4.8	ASTM D2261
	Widthwise Yarns	5.7	
BARRIER PROPERTIES	Bacterial Filtration Efficiency*	>99.9%	ASTM F2101
	Water Resistance	Pass	AATCC Method 42
	Synthetic Blood Penetration Resistance	Pass	ASTM F1670-08
SKID-RESISTANCE PROPERTIES	Coefficient of Friction (COF)		
	Kinetic COF	3.54	ASTM D1894
	Static COF	2.88	
CHEMICAL RESISTANCE	Sulfuric Acid (70% Concentration)	Pass	ASTM F903
	Phosphoric Acid (85% Concentration)	Pass	
	Hydrochloric Acid (37% Concentration)	Fail	
	Household Bleach (100% Concentration)	Pass	

*Control Average: 2928 CFU.

All test results provided by independent third-party testing laboratories located in USA.

WARNING: These garments and associated materials are not suitable for use in some environments containing chemicals and/or hazardous agents. It is the responsibility of the user to determine the level of risk in a particular environment and the proper personal protection equipment needed. Garments manufactured from synthetic non-woven material may generate static electricity. Garments that contain an anti-static treatment are not intended to be used as a safety feature. These garments are not recommended to be used in a flammable and or explosive environment. Contact VWR International for garment/fabric safety data. The application of these products is out of VWR International's control. Therefore, VWR International, LLC makes no warranties, expressed or implied, and assumes no liability as to the performance of these products for a particular use. Caution: Avoid heat and/or open flame.



Prices, product appearance and specifications are current at the time of printing, subject to change without notice. Availability for certain products may be limited by federal, state, provincial or local licensing requirements. VWR makes no claims or warranties concerning sustainable/green products. Any claims concerning sustainable/green products are the sole claims of the manufacturer and not those of VWR International, LLC. All prices are in U.S. dollars unless otherwise noted. Offers valid in USA and Canada, void where prohibited by law or company policy, while supplies last. Visit vwr.com to view our privacy policy and additional disclaimers.

VWR, forms of VWR, and the VWR logo and/or design are either registered trademarks ®, trademarks ™, or service marks ™ of VWR International, LLC in the United States and/or other countries. All other marks referenced herein are registered trademarks, trademarks or service marks of their respective owner(s). For a complete list of trademark owners please visit vwr.com.

©2010 VWR International, LLC. All rights reserved.

0410 REV3