
RANGE 8.A

CORROSION RESISTANT LABORATORY CABINETS for Acids and Bases

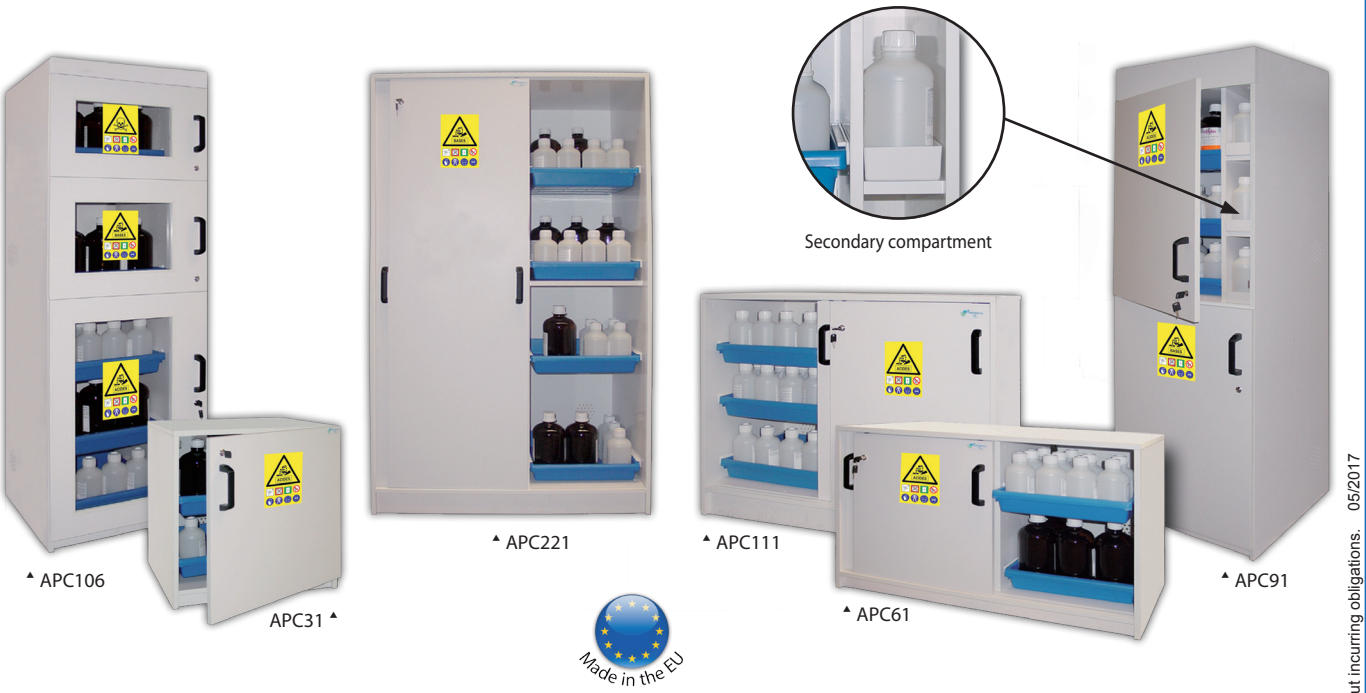

CERTIFICATION

- Large warning labels in compliance with ISO 3864, 92/58/CEE European directive and NF X08.003 norm.
- In compliance with recommendations of The National Institute for research and Safety at work (I.N.R.S).

ADVANTAGES

- Especially designed for acid and bases storage.
- Built in cellular PVC with a great resistance to vapors aggresions and corrosives liquids.
- Cabinets with sliding drawers for acid or/and base storage.

PASSIVE SECURITY

- Built entirely in white cellular PVC.
- «Corrosive», «Base» and «Toxic» large warning labels (only the 3 for APC106 model).
- Adjustable retention sliding drawers for each major compartment.
- Independant compartments (except APC31 model) for acid, base or/and toxic products storage (only for APC106 model).
- Each compartment is divided in a major and a secondary storage area (except APC61, APC111 and APC221 models).

ACTIVE SECURITY

- High and low opening vent Ø 100 mm with connecting piece for possible exhaust.
- Door(s) with lock :
  - Handling door(s) for APC31, APC91 and APC106 models.
  - Sliding doors for APC61, APC111 and APC221 models.
- Adjustable leveling feet for enhance stability.

Recycling AirBox labopur - H50

Take advantage of **labopur**'s technology with any safety cabinet. Active coal filters absorbtion's capacity and filtration system are tested and certified NF X 15-211.



P/N	Outside dim. H x W x D (mm)	Number of compartment		Number of retention		Storage capacity (kg)	Containment capacity (L)	Maximum load by shelf[1] (kg)	Weight (kg)
		Major	Secondary	Drawers in major	Shelves in second.				
APC31	670 x 635 x 615	1	1	2	2	68	28	20	30
APC61	670 x 1135 x 615	2	-	4	-	96	44	20	60
APC91	1850 x 635 x 615	2	2	6	6	150	84	20	90
APC111	900 x 1135 x 615	2	-	6	-	144	66	20	110
APC106	1850 x 635 x 615	3	3	5	5	170	70	20	83
APC221	1850 x 1135 x 615	2	-	8	-	192	88	20	155
E8A2	Containment shelf/sump sliding					20	11		6

[1] Evenly distributed

The manufacturer reserves the right to discontinue or change specifications or designs at any time without notice and without incurring obligations. 05/2017